

# 12J Series




The 12J series is a lead-wired temperature measurement sensor with epoxy-filled plastic shell. Designed for use in refrigeration and other high humidity environments, it can also be used successfully in general purpose applications. UL recognized models available upon request.

## Specifications

- Typical thermal time constant 11 sec. (measured: 25°C air to 85°C stirred water, 63.2%  $\Delta T$ )
- Operating temperature range -40°C to 80°C or -40°C to 105°C(dependant on wire rating)
- Temperature exposure 1000 hours at -20°C & at 80°C, typical < 1%  $\Delta R$
- Insulation strength 3750VAC/0.5mA/2sec.
- Stable performance with high degree of accuracy
- Moisture resistance

## Applications

- Refrigeration systems
- Freezer compartments
- Floor Heating
- Heat pumps
- Boilers
- Ambient temperature sensing

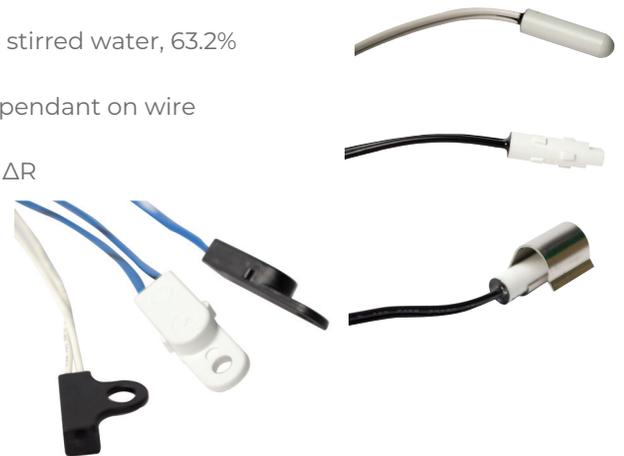

# Technical Data

Typical Resistance/Temperature

T (°C)	Grade 1	Grade 5	Grade 9	Grade 15	Grade 18	Grade 19	Grade 25
	B25/85=3977K	B25/85=4107K	B25/85=3435K	B25/85=3740K	B25/85=4269K	B25/85=3468K	B25/85=3680K
Multiplier							
-40	33.73	37.25	19.58	25.79	43.67	21.65	24.87
-35	24.32	26.63	14.83	19.12	30.73	16.23	18.34
-30	17.74	19.26	11.34	14.31	21.89	12.30	13.69
-25	13.08	14.07	8.76	10.81	15.77	9.41	10.33
-20	9.74	10.38	6.83	8.23	11.48	7.27	7.88
-15	7.321	7.74	5.37	6.33	8.45	5.66	6.07
-10	5.55	5.83	4.25	4.90	6.28	4.45	4.72
-5	4.25	4.42	3.39	3.83	4.71	3.52	3.71
0	3.27	3.38	2.72	3.01	3.56	2.81	2.93
5	2.54	2.61	2.20	2.38	2.72	2.26	2.34
10	1.99	2.03	1.79	1.90	2.09	1.82	1.87
15	1.57	1.59	1.47	1.52	1.62	1.48	1.51
20	1.25	1.26	1.21	1.23	1.27	1.21	1.23
25	1	1	1	1	1	1	1
30	0.81	0.80	0.83	0.82	0.79	0.83	0.82
35	0.65	0.84	0.69	0.67	0.63	0.69	0.68
40	0.53	0.52	0.58	0.55	0.51	0.58	0.56
45	0.44	0.43	0.49	0.46	0.41	0.49	0.47
50	0.36	0.35	0.41	0.38	0.33	0.41	0.39
55	0.30	0.29	0.35	0.32	0.27	0.35	0.33
60	0.25	0.24	0.30	0.27	0.22	0.30	0.28
65	0.21	0.20	0.26	0.23	0.19	0.25	0.23
70	0.18	0.17	0.22	0.19	0.15	0.22	0.20
75	0.15	0.14	0.13	0.17	0.13	0.19	0.17
80	0.13	0.12	0.17	0.14	0.11	0.16	0.14
85	0.11	0.10	0.15	0.12	0.09	0.14	0.12
90	0.09	0.08	0.13	0.11	0.08	0.12	0.11
95	0.08	0.07	0.11	0.09	0.07	0.11	0.09
100	0.07	0.06	0.10	0.08	0.06	0.10	0.08
105	0.06	0.05	0.09	0.07	0.05	0.08	0.07
110	0.05	0.05	0.08	0.06	0.04	0.07	0.06
115	0.04	0.04	0.07	0.05	0.04	0.07	0.05
120	0.04	0.03	0.06	0.05	0.03	0.06	0.05
125	0.03	0.03	0.05	0.04	0.03	0.05	0.04
130	0.03	0.03	0.05	0.04	0.02	0.05	0.04
135	0.03	0.02	0.04	0.03	0.02	0.04	0.03
140	0.02	0.02	0.04	0.03	0.02	0.04	0.03
145	0.02	0.02	0.03	0.03	0.02	0.03	0.02
150	0.02	0.02	0.03	0.02	0.01	0.03	0.02

**Other values are available upon request. For higher temp values, contact a Therm-O-Disc Sales Engineer.**

## APPLICATION NOTES

### Product Nomenclature Thermistors

#### Model Designation System

XXJ	1B	XXXXX
I	II	III

I – Series designator, where X is any numeral between 0-9

II – Grade and NTC type (Ex: 1B, 1E, 1G, 1H, 1M, 1R, 1S, etc.)

III – Customer specific numbers (4 or 5 digits)

### Product Nomenclature Thermistors – UL Recognized

#### Model Designation System

XXJ	1B	A	M	Z	XXXXX
I	II	III	IV	V	VI

I – Series designator, where X is any change to numeral between 0-9

II – Grade and NTC type (Ex: 1B, 1E, 1G, 1H, 1M, 1R, etc.)

III – Temperature rating – A, B, C etc. – See table below for details

III	Max Op Temp	III	Max Op Temp
A	80	F	130
B	90	G	150
C	105	H	180
D	120	K	200
E	125		

IV – Construction

E - Plastic shell with epoxy fill

M - Metal shell

R - Molded in plastic

X - Not insulated with or without shell

V – Investigation Standard Code

Z - NTC elements tested to UL60730-1

Without Z - NTC elements tested to UL1434

VI – Customer specific numbers (4 or 5 digits)

### Part # - J Probes Not UL Recognized Using RTD Sensors

#### Model Designation System

XXJ	PT	102	XXXXX
I	II	III	VI

I – Product Series Designator

II – Material of RTD: PT = Platinum RTD, NI = Nickel RTD

III – Resistance: 201 = 200 ohms, 501 = 500 ohms, 102 = 1,000 ohms

VI – Customer specific numbers (4 or 5 digits)

### Product Nomenclature RTD Sensors

#### Model Designation System

XXJ	PT	103	XX	X	XXXXX
I	II	III	IV	V	VI

I – Series designator

II – Material of RTD: PT = Platinum RTD, NI = Nickel RTD

III – Resistance: 201 = 200 ohms, 501 = 500 ohms, 102 = 1,000 ohms

IV – Max Temperature Rating Designator – A, B, C etc. - See table below for details (1 or 2 letters)

III	Max Op Temp	III	Max Op Temp
A	80	M	300
B	90	N	350
C	105	P	400
D	120	Q	450
E	125	R	500
F	130	S	520
G	150	T	540
H	180	U	560
K	200	V	580
L	250	W	600

V- Construction Designator:

E- Plastic shell with epoxy fill (shrink tube does not need to be UL recognized if plastic is the insulator)

M- Dead metal shell

R- Molded in plastic

X- Not insulated with or without shell

VI – Customer specific numbers (4 or 5 digits)